

Rec'd PCT/PTO 01 FEB 2005

PCT/GB 2003 / 0 0 3 3 7 0



GB03/03370

INVESTOR IN PEOPLE

10/522910

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 01 OCT 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*H. Behan*

Dated

18 September 2003

**BEST AVAILABLE COPY**

# Patents Form 1/77

Patents Act 1977  
(Rule 16)

The  
Patent  
Office

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

A1467

2. Patent application number

(The Patent Office will fill in this part)

0217913.3

02AUG02 E737992-1 002752  
P01/7700 0.00-0217913.3

01 AUG 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Sonico Ltd  
Purac House  
Birmingham Road  
Kidderminster DY10 2SH

Patents ADP number (if you know it)

8437808001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Fluid Processing Apparatus

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ABLETT & STEBBING  
CAPARO HOUSE  
101-103 BAKER STREET  
LONDON  
W1U 6FQ

Patents ADP number (if you know it)

00006551001✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:


- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Yes

See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	15
Claim(s)	4
Abstract	0
Drawing(s)	3 + 3 

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent ( <i>Patents Form 7/77</i> )	0
Request for preliminary examination and search ( <i>Patents Form 9/77</i> )	0
Request for substantive examination ( <i>Patents Form 10/77</i> )	
Any other documents ( <i>please specify</i> )	0

11. I/We request the grant of a patent on the basis of this application.

Signature

  
ABLETT & STEBBING

Date

1 August 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

G K ABLETT / S J SUER (0207-935-7720)

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## FLUID PROCESSING APPARATUS

This invention is concerned with fluid processing devices, particularly but not exclusively for use in the treatment of  
5 sewage. The term "sewage" as used herein means domestic/municipal and industrial wastewaters and sludges.

The application of ultrasonic energy to sewage improves subsequent response of the sewage to treatment. For example,  
10 in the specification of European patent 0648531 there is described a fluid processing device comprising a chamber through which fluid to be processed may be fed, and an operating member having a circular cross-section in the chamber, the operating member comprising a plurality of  
15 surfaces including at least one interior circumferential surface, the device comprising means to cause said surfaces to vibrate at an ultrasonic frequency. In use, the fluid to be treated is flowed through the chamber and over the circumferential surface, whereby ultrasonic energy is provided  
20 to the flowing fluid.

It has been now found that an advantageous fluid processing device, particularly for the treatment of raw sewage, comprises an elongate passage conveniently of circular cross-  
25 section through which fluid to be processed is fed, a plurality of axially spaced operating members in the passage, each operating member having an inner surface defining an inner passage through which fluid flowing through the device passes, and means to cause the inner surface of the operating  
30 members to vibrate at ultrasonic frequency generally radially of the operating member. In use, sewage flow through the elongate passage flows through the inner passages wherein it is subjected to ultrasonic energy derived from the vibrating

inner surface of the operating members.

~~To allow access to the operating members, for example for~~  
maintenance purposes, access passages may be provided adjacent  
5 the elongate passage. However, such access passages must be  
of sufficient size to enable a person sufficient room to gain  
access to the operating members. For example, an access  
passage may typically have a substantially circular cross-  
section of approximately one metre diameter. Thus, such  
10 access passages can consume a considerable amount of space.

An approach to minimising the amount of space required for  
access passages is to substantially align the operating  
members along the elongate passage. However, such alignment  
15 of the operating members may prevent them from being  
positioned in sufficiently close axial proximity for optimum  
performance.

The present invention seeks to provide apparatus which can  
20 overcome the problems associated with the prior art discussed  
above.

According to the present invention there is provided a fluid  
processing apparatus for use in an elongate passage, the  
25 apparatus comprising a plurality of means for applying  
ultrasonic energy to fluid within the passage positioned  
axially along the elongate passage, wherein axially adjacent  
means for applying ultrasonic energy are radially non-parallel  
and radially non-opposing.

30

Thus, in the apparatus of the present invention, axially  
adjacent means for applying ultrasonic energy are radially  
displaced relative to each other at an angle between  $0^\circ$  and

180°. In this way, the means for applying ultrasonic energy may be positioned both axially and radially so as to provide optimum performance for processing fluid, whilst allowing for a reduction in the space required for access passages.

5

The precise angle of relative radial displacement between axially adjacent means for applying ultrasonic energy will be selected according to the particular circumstances in question, but will typically be between 0° and 90°, in particular 30° to 60°, for example substantially 45°.

The apparatus of the present invention comprises a plurality of means for applying ultrasonic energy. The more means for applying ultrasonic energy that are present, the larger the proportion of fluids which can be treated. Thus, the apparatus of the present invention may comprise two, three, four, five, six, seven, eight, nine, ten or more means for applying ultrasonic energy.

Preferably, there are provided at least four means for applying ultrasonic energy. In particular, five or more means for applying ultrasonic energy may be contained within the same elongate passage, enabling a highly efficacious treatment of the fluid to be obtained over a relatively compact distance.

In preferred embodiments of the present invention, alternate means for applying ultrasonic energy are radially aligned. Thus, for apparatus having five means for applying ultrasonic energy, the first, third and fifth means for applying ultrasonic energy may be radially aligned, as may the second and fourth. A particularly preferred embodiment of the present invention comprises five means for applying ultrasonic

energy, in which the means for applying ultrasonic energy are radially symmetrically disposed either side of a line parallel ~~with the longitudinal axis of the elongate passage.~~ More preferably, the first, third and fifth means for applying  
5 ultrasonic energy are substantially in radial alignment disposed on one side of the line, and the second and fourth means for applying ultrasonic energy are substantially in radial alignment disposed by a substantially equal amount on the other side of the line. In this embodiment, the first,  
10 third and fifth, and second and fourth means for applying ultrasonic energy are preferably radially disposed by substantially 45°.

The means for applying ultrasonic energy may be axially spaced  
15 so as to provide optimum efficiency for treating fluids. The actual axial spacing will of course depend upon the individual means for applying ultrasonic energy in question, for example the size and power thereof. Adjacent means for applying ultrasonic energy will cooperate to produce an area of maximum  
20 ultrasonic energy substantially equidistant between the adjacent means for applying ultrasonic energy which apply energy at substantially equal power. For example, in an elongate passage having a diameter of approximately 150mm, the optimum axial spacing of adjacent means for applying  
25 ultrasonic energy has been found be 50mm or less, in particular between 30 and 40mm.

Each means for applying ultrasonic energy may be activated independently. In this way, the amount of ultrasonic energy  
30 applied to a fluid within the elongate passage may be varied according to conditions. A particular fluid may require less processing by the apparatus of the present invention than another, which may not necessitate activation of all of the

means for applying ultrasonic energy. It has been found that a reduction in power of a means for applying ultrasonic energy may occur when the or each immediately upstream adjacent means for applying ultrasonic energy are deactivated. For example, 5 a reduction in power of a second downstream means for applying ultrasonic energy may occur if the axially adjacent first downstream means for applying ultrasonic energy is deactivated, compared to when said first means is activated.

- 10 Each means for applying ultrasonic energy preferably comprises an operating member connected to a vibration member, the operating member being connected to a source of ultrasonic energy. The means for applying ultrasonic energy preferably has an inner passage through which fluid flowing through the 15 apparatus passes. Preferably an inner surface of the inner passage is arranged to vibrate radially.

Preferably, the longitudinal axis of the inner passage of each means for applying ultrasonic energy is substantially 20 coincident with the longitudinal axis of the elongate passage. The elongate passage preferably has a circular cross-section, for example having a diameter of 150mm.

An additional problem which has been found is that detritus 25 contained in raw sewage, such as rags, paper, plastics etc., may accumulate in areas of low flow rate between the means for applying ultrasonic energy, (i.e. "dead" areas), which may eventually produce a reduction to the rate of flow of fluid through the apparatus, and possibly cause a blockage. This 30 problem is exacerbated in a preferred fluid processing device, wherein to increase the amount of ultrasonic energy applied to the fluid, the fluid also flows over outer surfaces of the means for applying ultrasonic energy, particularly through



generally annular passages between said outer surfaces and the interior surface defining the elongate passage.

---

Accordingly, the apparatus of the present invention may  
5 further comprise means for constraining or directing flow of fluid towards the longitudinal axis of the elongate passage.

By constraining or directing the fluid flow towards the longitudinal axis of the elongate passage or towards the inner  
10 passage, an increase in the flow rate of the fluid is produced. In the case of sewage, by this means a greater proportion of solids contained in the sewage will flow through the device on or more closely adjacent the longitudinal axis or directly through the inner passage and thus flow through  
15 areas of higher ultrasonic density than otherwise would be the case.

By so constraining the flow of fluid being treated towards the longitudinal axis of the elongate passage, it has been found  
20 that good flow characteristics of the fluid through a significantly larger number of sequential means for applying ultrasonic energy has been possible, than would otherwise have been the case.

25 Additionally, by increasing the fluid velocity, cavitation is produced which allows the creation of ultrasonic vibrations in those sections of the passage which are located between adjacent means for applying ultrasonic energy, increasing the efficiency of the device.

30

The increased velocity of flow along the passage can also ensure that a majority of detritus flows directly through the passage: any detritus which has flowed from the axis or the

inner passage will be pulled by the venturi effect towards the longitudinal axis or inner passage. In this manner it has been found that tendency for detritus to accumulate in areas of low flow rate between adjacent operating members is reduced.

5

Additionally, reduction in the flow of fluid over the outer surfaces of the operating members by accumulation in the space between said outer surfaces and the walls defining the elongate passage is minimised by increasing the proportion of  
10 detritus which flows generally along the longitudinal axis directly through the device.

The means for constraining flow of fluid or the fluid directing means can be produced separately from the elongate  
15 passage and, therefore, can be mounted in existing elongate passages.

Preferably said means for constraining flow of fluid or the fluid directing means comprises a funnelling device through  
20 which fluid to be treated flows into the device. The funnelling device may be produced from a sheet of material which is not corrosive in the fluid, for example, stainless steel or plastics materials.

25 Conveniently, the funnelling device is operative to reduce the cross-sectional area through which fluid flows by at least a factor of 4. In preferred embodiments, the funnelling device is operative to reduce the cross-sectional area through which fluid flows by at least a factor of 8. Thus, where the  
30 elongate passage is of circular cross-section having a diameter of 150mm, the funnel device may reduce the cross-sectional area of the passage to approximately 50mm diameter.

As referred to hereinabove, the elongate passage is preferably of circular cross-section. In this way, the passage therefore has no corners where detritus may build up.

---

5 Conveniently, the funnelling device is located within the elongate passage upstream of the means for applying ultrasonic energy. In this way, the fluid flow is constrained before it reaches the means for applying ultrasonic energy.

10 According to the present invention there is also provided a method of treating fluids, which method comprises placing the fluid processing apparatus according to the present invention into an elongate passage, and passing the fluid through the elongate passage.

15

Preferably the fluid is sewage sludge. The elongate passage through which the fluid passes may be aligned substantially horizontally, vertically, or at any suitable angle therebetween. However, vertically aligned elongate passages  
20 may require less space for fluid treatment than a substantially horizontally aligned elongate passage.

An embodiment of the present invention will now be described in detail with reference to the accompanying drawings, in  
25 which:

Figure 1 is a partial cut-away side view of an embodiment of the apparatus of the present invention;

Figure 2 is a cut-away end view of the embodiment shown in Figure 1; and

30 Figure 3 is a top view of the embodiment shown in Figures 1 and 2.

Referring to the Figures, an embodiment of the apparatus of

the present invention is shown in relation to an elongate passage in the form of a pipe 10. The apparatus comprises five means for applying ultrasonic energy 12, each means for applying ultrasonic energy comprising an operating member 14, 5 and an ultrasonic device 16 connected thereto. Each ultrasonic device 16 comprises a transducer 24, a booster encased within a seal clamp arrangement 26, and an extender 28.

10 Each operating member 14 is of substantially annular cross-section, comprising an outer surface 18, and an inner surface 20. Each ultrasonic device passes through the wall of the pipe 10.

15 In the present example, there are five operating devices 12 mounted on the pipe 10. However, any required number of operating devices can be present.

The inner surface 20 of each operating member defines an inner 20 passage of circular cross-section through which fluid flowing through the apparatus passes, and additionally the annular space between the outer surface 18 of the operating member 14 and the inner wall 11 of the pipe 10 provides an outer passage 19 through which fluid may also flow.

25

The five means for applying ultrasonic energy 12 are arranged in two axially aligned groups, the first group comprising the first, third and fifth means for applying ultrasonic energy 12, and the second group comprising the second and fourth 30 means for applying ultrasonic energy 12. Axially adjacent means for applying ultrasonic energy 12 are radially displaced relative to each other, the angle D shown in Figure 2 being approximately 45°.

In Figure 1, the distance A is the distance between adjacent operating members 14, and in the embodiment shown is 30-40mm.

However, this distance may be varied to obtain optimum performance according to the particular conditions in question. Distance B shown in Figure 1 is the depth of the operating members 14, and in the embodiment shown is approximately 40mm. The depth of the operating member 14 chosen according to the particular ultrasonic characteristics required from the operating member, and is typically equal to or less than one third of the wavelength of sound in the material used to fabricate the operating member (e.g. titanium). Distance C in Figure 2 is chosen such that each operating member 14 is positioned centrally within the pipe 10 along the longitudinal axis thereof. In the embodiment shown, this distance is approximately 243mm. This distance is typically one half of the wavelength of sound generated by the operating member 14, or a multiple thereof. Angle D in Figure 2 is the angle by which axially adjacent means for applying ultrasonic energy are radially disposed, and in the embodiment shown is approximately 45°. However, as referred to above, this angle may be between 0° and 180°. In this way, the means for applying ultrasonic energy may be positioned both axially and radially so as to provide optimum performance for processing fluid, whilst allowing for a reduction in the space required for access passages.

In use, the ultrasonic devices 16 are each energised, causing longitudinal vibrations at ultrasonic frequency to be applied from the extender 28 to the operating member 14. Specifically, the operating member 14 has an internal radius R1 and an external radius R2, the relationship being such that  $\pi(R1 + R2) = K\lambda$ , where K is an integer, and  $\lambda$  is the wavelength of the vibrations applied by the ultrasonic device

to the operating member 14. In this configuration the outer surface 18 and the inner surface 20 of the operating member alternatively radially expand and contract in a pulsating manner at ultrasonic frequency, apply ultrasonic energy to 5 fluid flowing through the pipe 10.

Mounted in the upstream end of the pipe 10 is a funnel device 30 which is a sliding fit in the end of the pipe 10, flanges 32 being provided to locate the funnel member 30 in a desired 10 location within the pipe. The funnel has a frusto-conical surface 34 which reduces the effective radius of pipe 10 typically from substantially 75mm to substantially 25mm, i.e. approximately equal to the radius  $R_1$ , reducing the cross-sectional area of the flow passage through the device by a 15 factor of 8 to 10.

In this manner, fluid fed through the apparatus is constrained towards the longitudinal axis of the apparatus, increasing the flow rate, and ensuring a greater proportion of solids are 20 located on or close to the longitudinal axis. Additionally, the higher flow rate increases cavitation within the fluid flow, and, therefore, effective ultrasonic vibrations will occur in the sections of the elongate passage located between adjacent operating members. Further, since the fluid is 25 flowing at a higher velocity through the apparatus than would otherwise be the case, the majority of detritus flows directly through the internal flow passage defined by the interior surfaces 20 of operating members 14. In this way the flow of detritus into the relatively "dead" spaces between adjacent 30 operating members 14 is reduced, reducing the tendency of such detritus to clog the outer passage 19.

Further, such detritus as may flow from the longitudinal axis

will tend to be pulled back into the main flow stream by the venturi effect of the relatively high speed flow of the fluid through the device.

---

5 In this way, it has been found that a high density of ultrasonic devices may be utilised, applying a large amount of ultrasonic energy to the fluid flow through the apparatus over a relatively short longitudinal distance, with significantly reduced tendency for blockage to occur.

10

Table 1 below shows results regarding the frequency and power of ultrasonic energy generated from the first to fifth means for applying ultrasonic energy of the embodiment of the present invention shown in the Figures, when different  
15 combinations of from zero to four means for applying ultrasonic energy are switched off. The power figures are the percentage of installed power applied, and the frequency values stated are thousands of Hertz.

Table 1.

Means for applying ultrasonic energy

One		Two		Three		Four		Five	
Power	Frequency	Power	Frequency	Power	Frequency	Power	Frequency	Power	Frequency
44	20.190	45	20.151	55	20.206	56	20.224	78	20.219
OFF	OFF	36	20.137	55	20.204	54	20.225	78	20.220
40	20.190	OFF	OFF	56	20.206	53	20.224	78	20.218
40	20.189	45	20.161	OFF	OFF	54	20.225	78	20.223
40	20.192	44	20.152	55	20.206	OFF	OFF	78	20.225
43	20.191	45	20.152	56	20.206	55	20.226	OFF	OFF
OFF	OFF	OFF	OFF	46	20.205	54	20.225	78	20.223
OFF	OFF	38	20.145	OFF	OFF	55	20.225	75	20.222
OFF	OFF	37	20.136	53	20.204	OFF	OFF	79	20.224
OFF	OFF	36	20.137	54	20.207	53	20.225	OFF	OFF
39	20.190	OFF	OFF	OFF	OFF	54	20.223	76	20.222
40	20.193	OFF	OFF	55	20.205	OFF	OFF	79	20.223
39	20.190	OFF	OFF	56	20.206	52	20.223	OFF	OFF
39	20.189	45	20.168	OFF	OFF	OFF	OFF	78	20.223

5

10

15



40	20.189	44	20.163	OFF	OFF	53	20.225	OFF	OFF
40	20.191	43	20.156	56	20.205	OFF	OFF	OFF	OFF
OFF	OFF	OFF	OFF	OFF	OFF	45	20.224	71	20.221
OFF	OFF	OFF	OFF	45	20.206	OFF	OFF	74	20.223
OFF	OFF	37	20.146	OFF	OFF	OFF	OFF	77	20.224
OFF	OFF	35	20.138	OFF	OFF	51	20.223	OFF	OFF
OFF	OFF	35	20.136	53	20.204	OFF	OFF	OFF	OFF
39	20.189	OFF	OFF	OFF	OFF	OFF	OFF	76	20.224
41	20.190	OFF	OFF	OFF	OFF	52	20.224	OFF	OFF
40	20.190	45	20.167	OFF	OFF	OFF	OFF	OFF	OFF
OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	64	20.197

5

10

As discussed above and as can be seen from Table 1, it has been found that a reduction in power of a means for applying ultrasonic energy may occur when the or each immediately upstream adjacent means for applying ultrasonic energy are 5 deactivated. For example, the power output of the second means for applying ultrasonic energy drops from 45% to 36% when the first means for applying ultrasonic energy is deactivated.

10 It is to be appreciated that whilst this invention has been devised specifically for the treatment of raw sewage, the invention may be utilised in the treatment of other fluids, where similar or analogous problems arise, and in particular where it is desired to apply ultrasonic energy to the fluid 15 in an efficient manner.

It will be understood that the embodiment illustrated shows one application of the invention only for the purposes of illustration. In practice the invention may be applied to 20 many different configurations, the detailed embodiments being straightforward for those skilled in the art to implement.

The means for applying ultrasonic energy may or may not have an inner passage.

25

The funnelling device can be integral with the pipe.

The funnelling device may be formed such that there is provided an inner passage with a frusto-conical surface. The 30 outer surface of the device could be any desired shape.

There may be any suitable number of ultrasonic devices in the elongate passage, for example, 4, 5, 6, 7, 8, 9, 15, 20.

CLAIMS

- 
1. Fluid processing apparatus for use in an elongate passage, the apparatus comprising a plurality of means for  
5 applying ultrasonic energy to fluid within the passage positioned axially along the elongate passage, wherein axially adjacent means for applying ultrasonic energy are radially non-parallel and radially non-opposing.
  - 10 2. Apparatus according to claim 1 wherein axially adjacent means for applying ultrasonic energy are relatively radially displaced by an angle between is between  $0^{\circ}$  and  $90^{\circ}$
  3. Apparatus according to claim 2 wherein the angle is from  
15  $30^{\circ}$  to  $60^{\circ}$ .
  4. Apparatus according to claim 3 wherein the angle is substantially  $45^{\circ}$ .
  - 20 5. Apparatus according to any preceding claim which comprises five or more means for applying ultrasonic energy contained within the same elongate passage.
  6. Apparatus according to any preceding claim wherein  
25 alternate means for applying ultrasonic energy are radially aligned.
  7. Apparatus according to any preceding claim which comprises five means for applying ultrasonic energy, in which  
30 the means for applying ultrasonic energy are radially symmetrically disposed either side of a line parallel with the longitudinal axis of the elongate passage.

8. Apparatus according to claim 7 wherein the first, third and fifth means for applying ultrasonic energy are substantially in radial alignment disposed on one side of the line, and the second and fourth means for applying ultrasonic  
5 energy are substantially in radial alignment disposed by a substantially equal amount on the other side of the line.

9. Apparatus according to any preceding claim wherein axially adjacent means for applying ultrasonic energy are  
10 axially spaced by an amount from 30 to 40mm.

10. Apparatus according to any preceding claim wherein each means for applying ultrasonic energy may be activated independently.

15

11. Apparatus according to any preceding claim wherein each means for applying ultrasonic energy preferably comprises an operating member connected to a vibration member, the operating member being connected to a source of ultrasonic  
20 energy.

12. Apparatus according to claim 11 wherein the means for applying ultrasonic energy has an inner passage through which fluid flowing through the apparatus passes.

25

13. Apparatus according to claim 12 wherein an inner surface of the inner passage is arranged to vibrate radially.

14. Apparatus according to claim 12 or 13 wherein the  
30 longitudinal axis of the inner passage of each means for applying ultrasonic energy is substantially coincident with the longitudinal axis of the elongate passage.

15. Apparatus according to any preceding claim which further comprises means for constraining flow of fluid towards the longitudinal axis of the elongate passage.

---

5 16. Apparatus according to claim 15, wherein said means for constraining flow of fluid comprises a funnelling device.

17. Apparatus according to claim 15 or 16, wherein said funnelling device is operative to reduce the cross-sectional  
10 area through which fluid flows by at least a factor of 4.

18. Apparatus according to claim 17, wherein said funnelling device is operative to reduce the cross-sectional area through which fluid flows by at least a factor of 8.

15

19. Apparatus according to any one of claims 15 to 18, wherein the funnelling device is located within the elongate passage upstream of the one or more means for applying ultrasonic energy.

20

20. Apparatus according to any preceding claim wherein each means for applying ultrasonic energy comprises a vibration member having an inner passage.

25 21. A method of treating fluids, the method comprising placing the fluid processing apparatus of any preceding claim into an elongate passage and passing the fluid through the elongate passage.

30 22. A method according to claim 21 wherein the fluid is sewage sludge.

23. A method according to claim 21 or 22 wherein the elongate

passage is aligned substantially vertically..

22. Fluid processing apparatus substantially as hereinbefore described with reference to the accompanying drawings.

5

23. A method substantially as hereinbefore described.

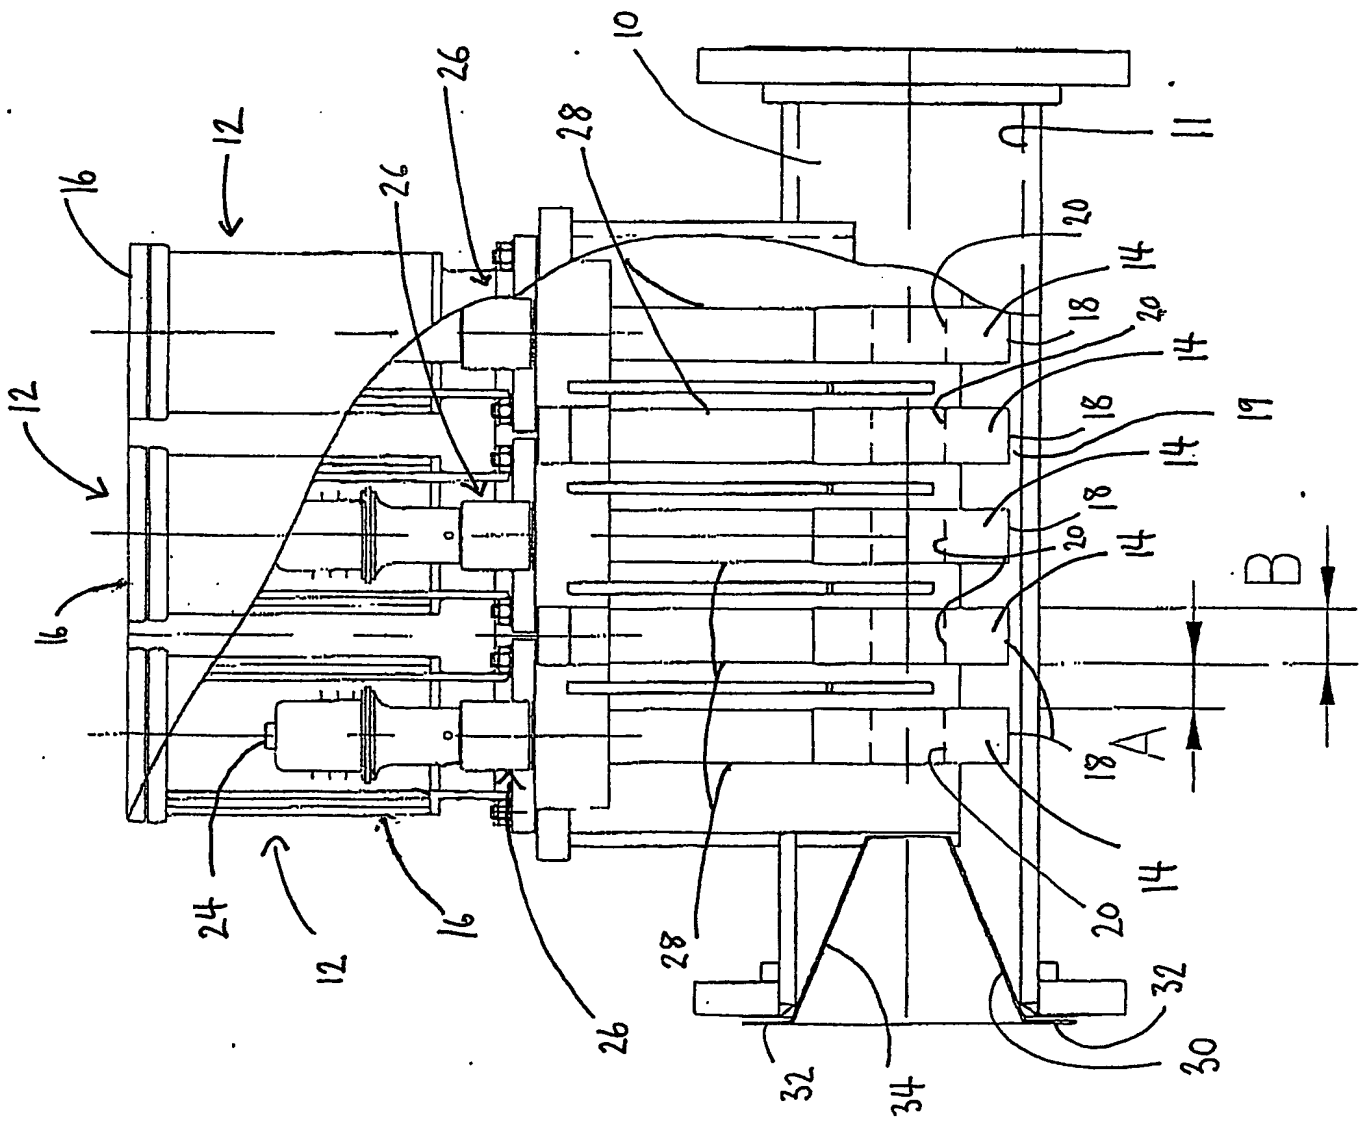


FIGURE 1

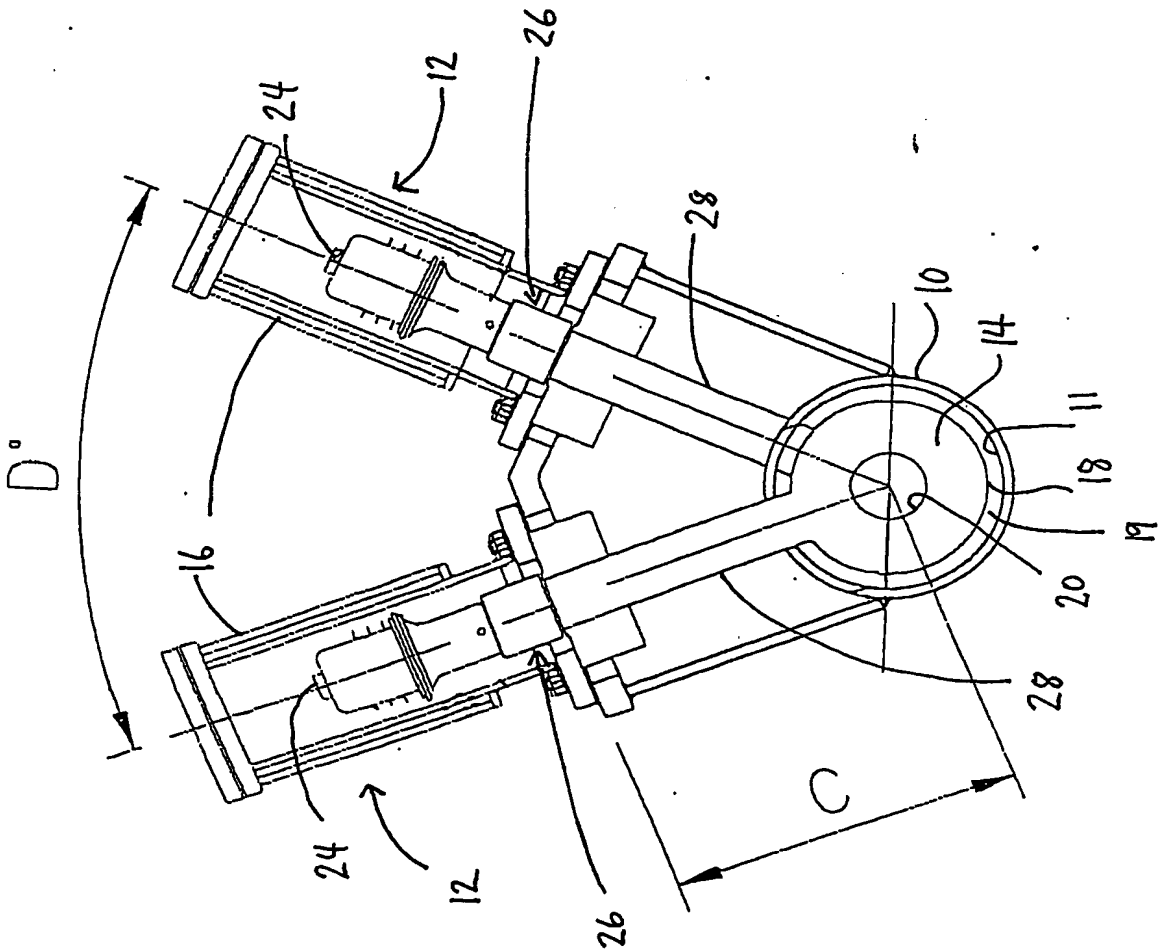


FIGURE 2



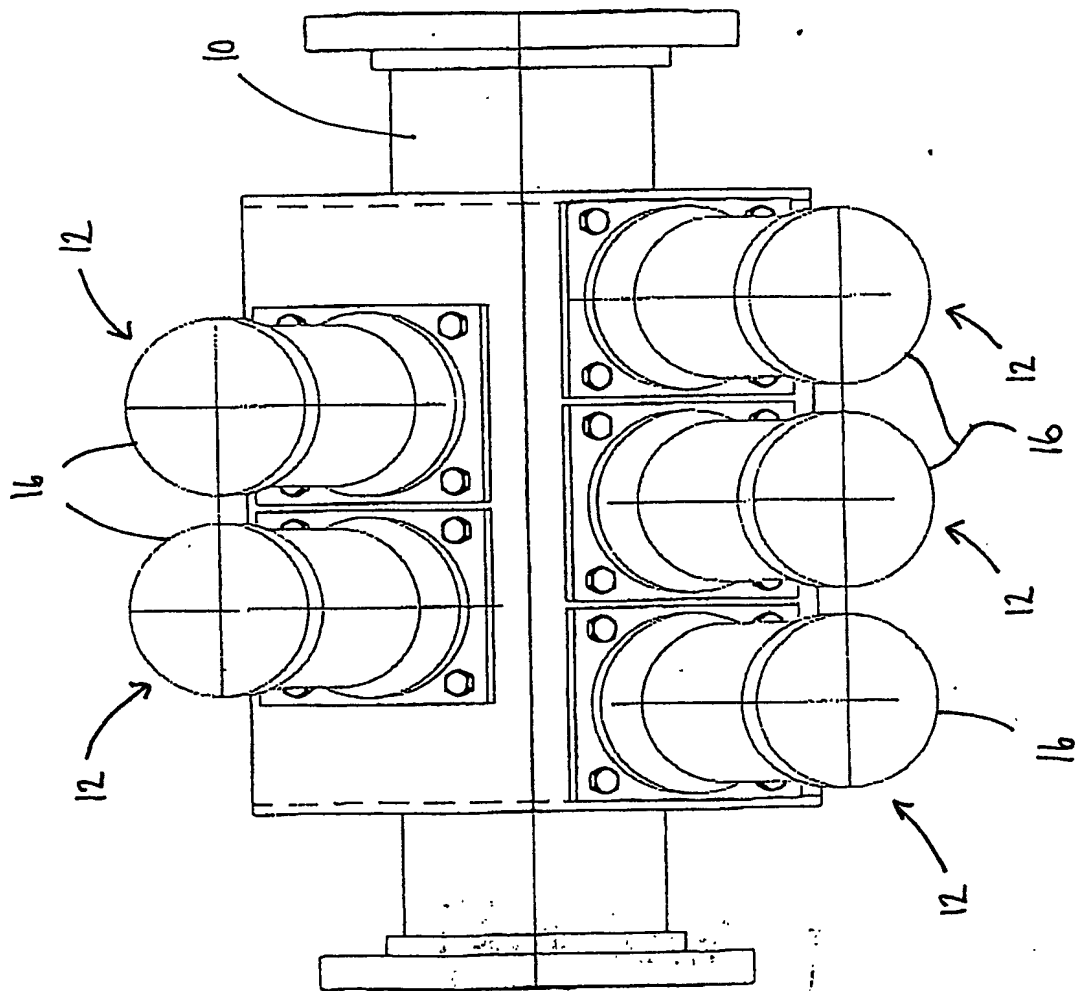


FIGURE 3

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**